



## Recovery King

RTR-70 is Metro Tow Trucks' largest rotator. Designed for extreme recovery operations, this rotator is capable of handling anything that you throw at it. The RTR-70 will distinguish you from the competition when trying to secure contracts or pulling up to an accident scene.

Mass without chassis: 22.6 ton (49,800 lbs)


### Standard features

- 6646 mm (262") Cab to centre of tandem standard steel body
- 2 x 30 ton (66,000 lbs) winches
- 1 set of frame fork holders and 4 sets of frame forks
- Frame fork and chain racks
- Safety chains
- Chrome door handles
- Driver side manual controls
- Air and 12V/24V outputs
- Non slide configuration

### Options

- Complete wireless remote control
- Proportional remote control
- Slide configuration
- 2 additional 20 ton (44,000 lbs) winches
- 609 mm (24"), 762 mm (30"), 914 mm (36"), 1219 mm (48"), 1828 mm (72") tunnel box
- Tailboard controls
- Extra frame forks
- Wheel lift receivers for single/double tire
- Full recovery tool package
- Custom storage system
- Aluminum or composite body
- European body style
- Durable Undercoating finish
- Front push bumper
- Front winch and Drag winch
- XP, X-shape side puller
- A-arm style side winches
- Steel core rope
- Chrome hand rails
- In cab controls
- Full size LED light bar and strobe lights
- LED working lights and lights inside the toolbox



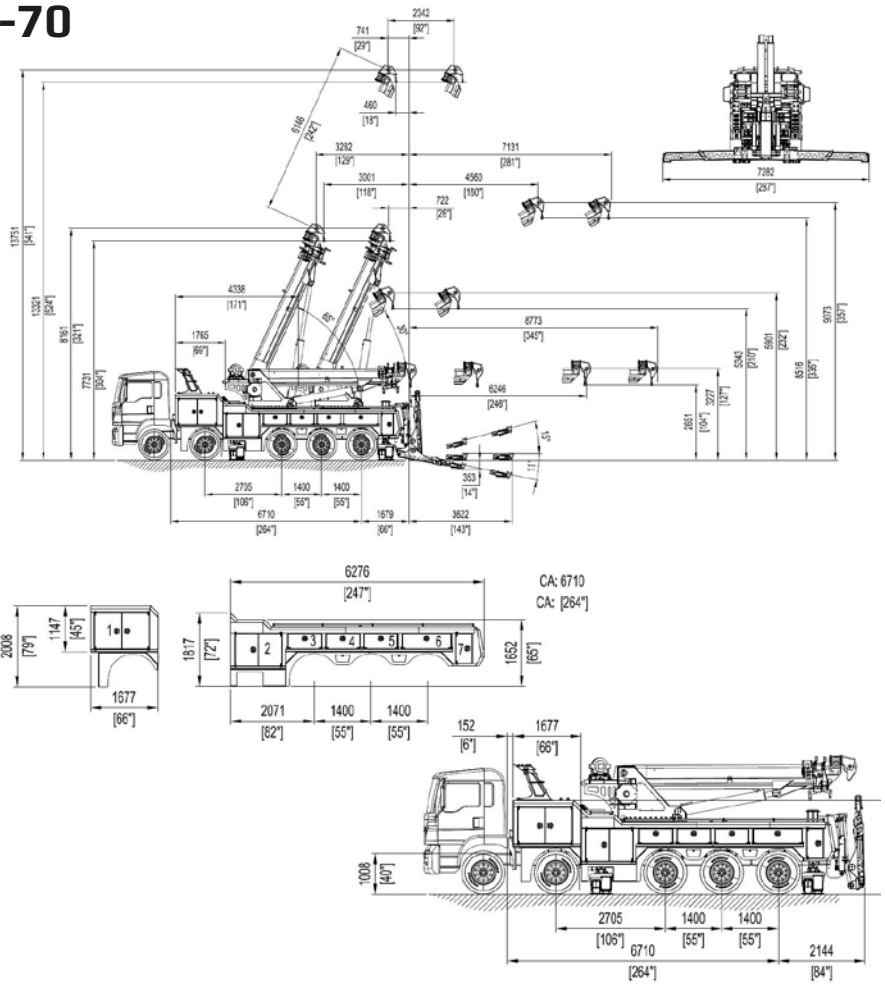

NOTE: Axle configuration is subject to local laws and regulations. All information in this document is for reference purposes only. Optional configuration might be shown.

### Underlift Specifications / \* = Euro Option

Retracted capacity on forks	<b>31,7 ton (70,000 lbs) / * same</b>
Retracted distance to the forks	<b>1844 mm (73") / * same</b>
Extended capacity on forks	<b>10,4 ton (23,000 lbs) / * same</b>
Extended distance to the forks	<b>3667 mm (144") / * 3810 mm (150")</b>
Negative tilt angle	<b>-11°</b>
Tow Rating (Based on Chassis)	<b>36 ton (80,000 lbs)</b>

### Boom Specifications

Retracted capacity (at 60°)	<b>70 ton (154,300 lbs)</b>
Extended capacity (at 60°)	<b>17.5 ton (38,500 lbs)</b>
Maximum Lift angle	<b>60°</b>
Maximum Hook Height	<b>12949 mm (549")</b>
Reach Past Tailboard	<b>8221 mm (324")</b>

### Vehicle Recommendations

Front axle(s) weight (min)	<b>9 ton (20,000 lbs)</b>
Rear axle(s) weight (min)	<b>9 ton (20,000 lbs) + 3 x 10.4 ton (23,000 lbs)</b>
Recommended Tire size	<b>R24.5</b>
Clear CA	<b>6646 mm (262")</b>

### Winch Specifications

Quantity	<b>2 pcs + 2 optional</b>
Pulling force (on 1st layer)	<b>30 ton (66,000 lbs) &amp; optional 20 ton (44,000 lbs)</b>
Winch type	<b>Planetary</b>
Cable specs	<b>25 mm x 60 m (1" x 200') optional 19 mm x 60 m (3/4" x 200')</b>

### Notes:

- Information with a star (\*) is for our low profile European style under lift specifications
- Some optional equipment may be shown.
- All ratings are based on structural and design factors only. Vehicle chassis capacity and capabilities can vary significantly, affecting the overall performance and rating of the unit. All chassis specifications are minimums, heavier specifications may be required depending on chassis and equipment weights. Please contact your nearest distributor for additional information.

Metro Tow Trucks Co. reserves the right to change, improve or modify products, which may change the specifications, models and feature availability at any time without notice and without obligation. Please contact your nearest distributor for additional information.

© Metro Tow Trucks. All rights reserved. This material may not be reproduced, displayed, modified or distributed without the express prior written permission of the copyright holder. For permission, contact Sales@MetroTowTrucks.com

### Metro Tow Trucks

E-mail: Sales@MetroTowTrucks.com

Toll Free (North America): 1-866-924-1675

Direct: +1-613-223-0139

Address: 2759 Lancaster Road,  
Ottawa, Ontario, Canada, K1B 4V8